


## Overview

Cisco GLC-LH-SMD 1000BASE-LX/LH SFP is made for Both Multimode and Single-Mode Fibers.

The 1000BASE-LX/LH SFP, compatible with the IEEE 802.3z 1000BASE-LX standard, operates on standard single-mode fiber-optic link spans of up to 10 km and up to 550 m on any multimode fibers. When used over legacy multimode fiber type, the transmitter should be coupled through a mode conditioning patch cable. 1300-nm wavelength, extended operating temperature range and DOM support, dual LC/PC connector.

This Figure shows the appearance of GLC-LH-SMD.

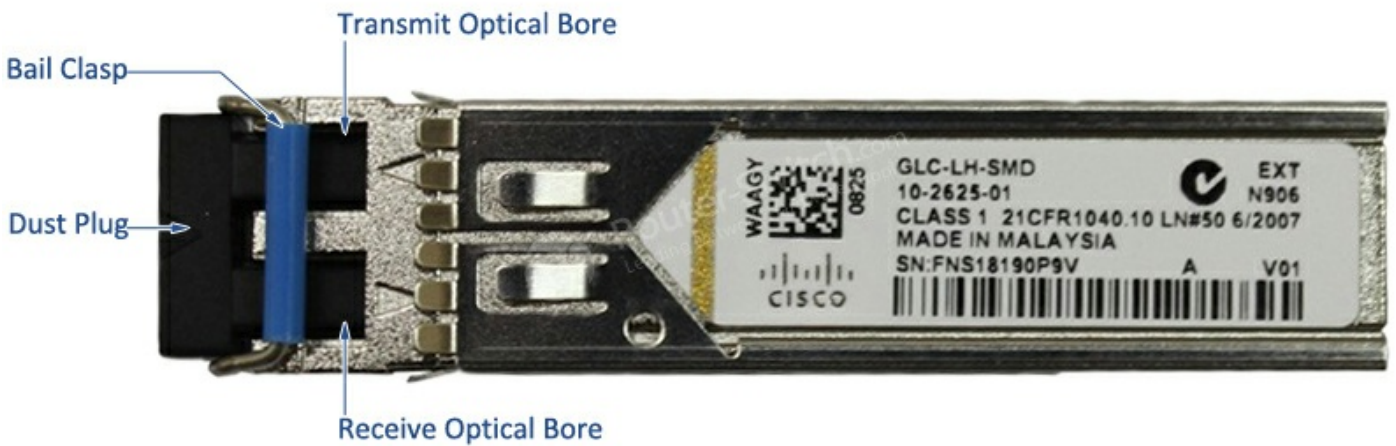

The table provides cabling specifications for the SFPs that you install in the Gigabit Ethernet port.

Note that all SFP ports have LC-type connectors, and the minimum cable distance for all SFPs listed (multimode and single-mode fiber) is 6.5 feet (2 m).

### SFP Port Cabling Specifications

Product	Wavelength (nm)	Fiber Type	Core Size (µm)	Modal Bandwidth (MHz* Km)***	Operating Distance (m)
1000BASE-SX (GLC-SX-MMD)	850	MMF	62.5	160 (FDDI-grade)	220 (722 ft)
			62.5	200 (OM1)	275 (902 ft)
			50	400 (400/400)	500 (1,640 ft)
			50	500 (OM2)	550 (1,804 ft)
			50	2000 (OM3)	1000 (3281 ft)
1000BASE-LX/LH (GLC-LH-SMD)	1310	MMF*	62.5	500	550 (1,804 ft)
			50	400	550 (1,804 ft)
			50	500	550 (1,804 ft)
		SMF	-**	-	10,000 (32,821 ft)
1000BASE-EX	1310	SMF	-**	-	40,000 (131,234 ft)
1000BASE-ZX (GLC-ZX-SM) (GLC-ZX-SMD)	1550	SMF	-	-	Approximately 70 km depending on link loss
1000BASE-BX-U	1310	SMF	-**	-	10,000 (32,821 ft)

<b>1000BASE-BX-D</b>	1490	SMF	-**	-	10,000 (32,821 ft)
----------------------	------	-----	-----	---	--------------------

\*A mode-conditioning patch cord, as specified by the IEEE standard, is required regardless of the span length. Note how the mode conditioning patch cord for 62.5- $\mu$ m fibers has a different specification from the mode-conditioning patch cord for 50- $\mu$ m fibers.

\*\*ITU-T G.652 SMF as specified by the IEEE 802.3z standard.

\*\*\*Specified at transmission wavelength.

## Get more information

Do you have any question about the GLC-LH-SMD?

Contact us now via [Live Chat](#) or [sales@router-switch.com](mailto:sales@router-switch.com).

## Specification

SFP Port Cabling Specifications					
Product	Wavelength (nm)	Fiber Type	Core Size ( $\mu$ m)	Modal Bandwidth (MHz* Km)***	Operating Distance (m)
1000BASE-SX	850	MMF	62.5	160 (FDDI-grade)	220 (722 ft)
			62.5	200 (OM1)	275 (902 ft)
			50	400 (400/400)	500 (1,640 ft)
			50	500 (OM2)	550 (1,804 ft)
			50	2000 (OM3)	1000 (3281 ft)
<b>1000BASE-LX/LH</b>	<b>1310</b>	<b>MMF*</b>	<b>62.5</b>	<b>500</b>	<b>550 (1,804 ft)</b>
			<b>50</b>	<b>400</b>	<b>550 (1,804 ft)</b>
			<b>50</b>	<b>500</b>	<b>550 (1,804 ft)</b>
		<b>SMF</b>	<b>-**</b>	<b>-</b>	<b>10,000 (32,821 ft)</b>
1000BASE-EX	1310	SMF	-**	-	40,000 (131,234 ft)
1000BASE-ZX (GLC-ZX-SMD)	1550	SMF	-	-	Approximately 70 km depending on link loss
1000BASE-BX-U	1310	SMF	-**	-	10,000 (32,821 ft)
1000BASE-BX-D	1490	SMF	-**	-	10,000 (32,821 ft)

Note:

\*A mode-conditioning patch cord, as specified by the IEEE standard, is required regardless of the span length. Note how the mode conditioning patch cord for 62.5- $\mu$ m fibers has a different specification from the mode-conditioning patch cord for 50- $\mu$ m fibers.

\*\*ITU-T G.652 SMF as specified by the IEEE 802.3z standard.

\*\*\*Specified at transmission wavelength.

## Download Resource

### Support and Resources

 [Cisco SFP GLC Module Datasheet.pdf](#)

## Want to Buy

---

Order Now

Get a Quote

## Why Router-switch.com

---

As a leading network hardware supplier, Router-switch.com focuses on original new ICT equipment of [Cisco](#), [Huawei](#), [HPE](#), [Dell](#), [Hikvision](#), [Juniper](#), [Fortinet](#), etc.



200+

Countries we Sold



18,000+

Customers Trusted



\$20,000,000

Inventory Available



50%-98%

Off Global List Price



100%

Safe Online Shopping

## Contact Us

---

- Tel: +1-626-239-8066 (USA) +852-3050-1066 / +852-3174-6166
- Fax: +852-3050-1066 (Hong Kong)
- Email: [sales@router-switch.com](mailto:sales@router-switch.com)